



SUBMITTAL DATA SHEET

Job Name:		Contractor:	
Location:		Distributor:	
Engineer:		Date:	
Submitted To:		Model No:	MAX 50-e-LV
Schedule ID:			


Max Air Specifications	Max 50-e-LV
BTUH Heating @ 180°F E.W.T.	72,850
BTUH Heating @ 170°F E.W.T.	66,085
BTUH Heating @ 160°F E.W.T.	59,334
BTUH Heating @ 150°F E.W.T.	52,601
BTUH Heating @ 140°F E.W.T.	45,888
BTUH Heating @ 130°F E.W.T.	39,202
BTUH Heating @ 120°F E.W.T.	32,546
DX Cooling (tons) ⁽¹⁾	1.0(**) – 2.0
Power	120/1/60
C.F.M. @ .5" E.S.P.	830(**)
HP - RPM (fan)	1/2 – ECM
Amps @ 120/1/60	6.8
G.P.M. Flow Rating	5
Copper Connection Size ϕ	1/2"
Supply Air Connection - top	11" x 16"
Return Air Size Required	12" x 14" min.
Physical Dimensions (L/W/H)	24"x14"x18-1/2"

(**) consult factory for application requiring reduce capacity



Features

Accurate Temperature Control / 2-stage Heating, 2-stage Cooling or 2-stage Heating/Cooling Applications / Multiple CFM Options / Loop Sensing Control Option / Multi-positional placement / Easily Installed / Easily Serviced / Multiple Return Options / Compact Size / Extensive Warranty

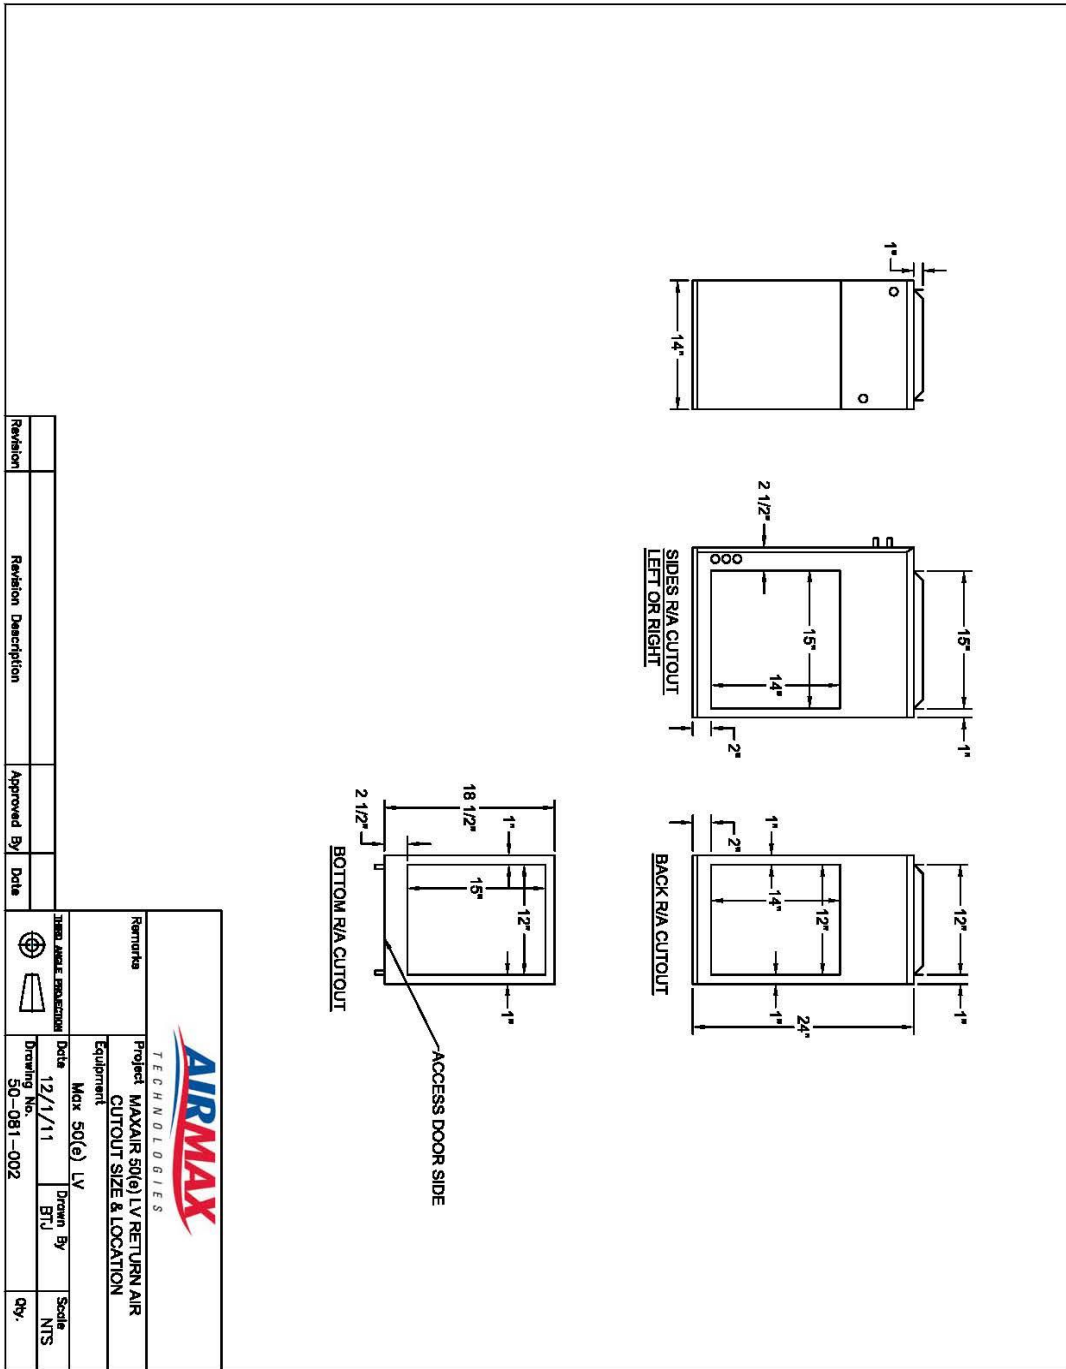

Warranty

1 Year Parts and Labour, plus additional 12 months parts only, where applicable

NOTES:
