



SUBMITTAL DATA SHEET

Job Name:		Contractor:	
Location:		Distributor:	
Engineer:		Date:	
Submitted To:		Model No:	MaxAir70eP3
Schedule ID:		No. of Outlets:	

Max Air Specifications	MaxAir70eP3
BTUH Heating @ 180°F E.W.T.	77,981
BTUH Heating @ 170°F E.W.T.	69,804
BTUH Heating @ 160°F E.W.T.	58,902
BTUH Heating @ 150°F E.W.T.	50,519
BTUH Heating @ 140°F E.W.T.	46,278
BTUH Heating @ 130°F E.W.T.	41,000
DX Cooling (tons) ⁽¹⁾	2.0 - 2.5(**)
Power	120/1/60
C.F.M. @ 1.5" E.S.P.	750(**)
HP - RPM (fan)	3/4 HP – 1800 RPM (ECM – DC voltage)
Amps @ 120/1/60	9.0 FLA
G.P.M. Flow Rating	7
Copper Connection Size Ø	3/4"
Supply Air Connection - top	QTY (2) x 8", Qty (1) x 6"
Minimum Outlets (per supply)	6
Maximum Outlets (per supply)	8 ⁽³⁾
Return Air Size Required	16" x 15" min.
Physical Dimensions (L/W/H)	43"x19-1/2"x18"

⁽¹⁾ Smaller condensers may be matched to fan coil when required (match TXV to condenser size)

⁽²⁾ Dual supply outlet

⁽³⁾ Consult factory when designing with increased outlet counts

(**) consult factory for 1 ton application regarding reduce capacity and outlet requirement

Features


Prioritizing Comfort Levels / 3 Zone Capability / Plenum Sensor Equipped / Temperature Display
/ HI/Low Limit Cutout Adjustment / 2-Stage Heating/Cooling / Multiple CFM Options / Multi-
Positional Placement / Easily Installed / Easily Serviced / Multiple Return Options / Compact Size
/ Extensive Warranty

AIRMAX

T E C H N O L O G I E S

Accessories

Qty	Part #	Description
	MA30-70-R410-A	30,000 BTU Horizontal DX Coil w self-adjusting TXV and freeze stat
	121-001	Diffuser c/w Damper
	125-001	Rough-In Kit (includes elbow, dust cap + take-off)
	107-001	Floor Extension riser (1.75")
	123-001	10ft, 2.5" flex duct assembly with connector
	124-001	5ft, 2.5" flex duct assembly with connector
	140-005	Circulating pump (c/w check valve) 3/4" sweat - field installed

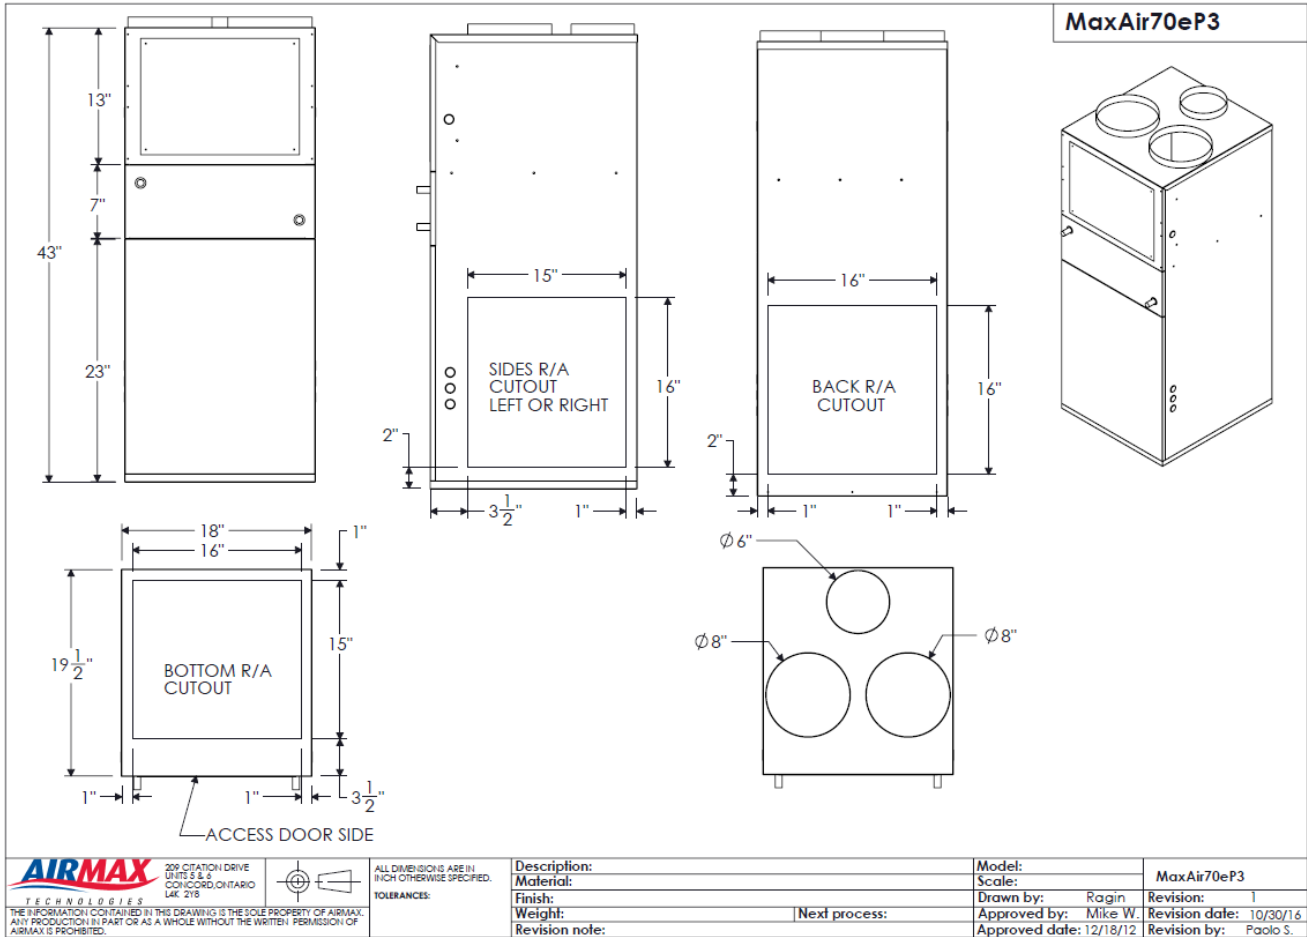

Warranty

1 Year Parts and Labor, plus additional 12 months parts only, where applicable

NOTES:

SBML-MaxAir70eP3

209 Citation Dr, Unit 5+6 Concord Ontario, L4K 2Y8. Tel: 905-264-1414, Fax: 905-264-1147